


**DIN 6923****HEXAGON FLANGE NUTS**

Teknik Bilgiler / Technical Informations								
Thread size / Anma çapı (d)			M4	M5	M6	M8 M8x1,00	M10 M10x1,25M 10x1,00	M12M 12x1,50M 12x1,25
Pitch / Diş adımı	P		0,70	0,80	1,00	1,25	1,50	1,75
Head width / Anahtar ağızı	s	min.	6,78	7,78	9,78	12,73	14,73	17,73
		max.	7,00	8,00	10,00	13,00	15,00	18,00
Diagonal / Köşegen	e		7,74	8,79	11,05	14,38	16,64	20,03
Height / Yükseklik	m	min.	4,20	4,70	5,70	7,60	9,60	11,60
		max.	4,50	5,00	6,00	8,00	10,00	12,00
Flange dia / Flanş çapı	D	min.	8,30	9,80	12,20	15,80	19,60	23,80
		max.	10,30	11,80	14,20	17,90	21,80	26,00
Weight / Ağırlık	gr/p		2,50	2,75	3,20	6,90	12,20	22,00

Thread size / Anma çapı (d)			M14 M14x1,50	M16 M16x1,50	M20 M20x1,50
Pitch / Diş adımı	P		2,00	2,00	2,50
Head width / Anahtar ağızı	s	min.	20,67	23,67	29,67
		max.	21,00	24,00	30,00
Diagonal / Köşegen	e		23,36	26,75	32,95
Height / Yükseklik	m	min.	13,30	15,30	18,90
		max.	14,00	16,00	20,00
Flange dia / Flanş çapı	D	min.	27,60	31,90	39,90
		max.	29,90	34,50	42,80
Weight / Ağırlık	gr/p		30,00	47,00	

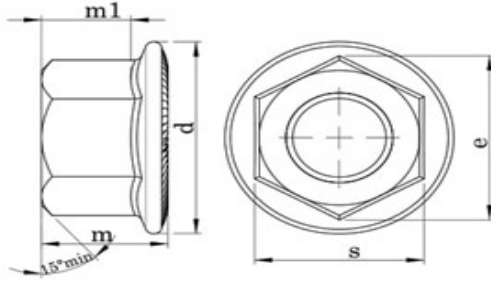

DIN 6923 Hexagon Flange Nuts have a circular washer like flange shaped base that increases the weight bearing surface area to distribute the load over a greater area when tightened. The flange eliminates the need to use a washer with the nut. DIN 6923 Hexagon Flange Nuts are available with or without serrations. The serrations function to act as a locking mechanism to reduce loosening due to vibrational forces.

