


**DIN 929****HEXAGON WELD NUTS**

Teknik Bilgiler / Technical Informations		M4	M5	M6	M7	M8	M10
Thread size / Anma çapı (d)		0,70	0,80	1,00	1,00	1,25	1,50
Pitch / Diş adımı	P	0,70	0,80	1,00	1,00	1,25	1,50
Weld nail / Kaynak tırnağı	h min.	0,60	0,60	0,68	0,68	0,75	0,95
	h max.	1,00	1,00	1,12	1,12	1,25	1,55
Head width / Anahtar ağızı	s	9,00	10,00	11	12,00	14,00	17,00
Diagonal / Köşegen	e min.	9,83	10,95	12,02	13,40	15,38	18,74
Height / Yükseklik	max.	3,50	4,00	5,00	5,50	6,50	8,00
	Weight / Ağırlık	gr/p	1,13	1,73	2,50	3,24	5,27

Thread size / Anma çapı (d)		M12	M14	M16
Pitch / Diş adımı	P	1,75 1,25	2,00 1,50	2,00 1,50
Weld nail / Kaynak tırnağı	h min.	0,95	1,10	1,10
	h max.	1,55	1,90	1,90
Head width / Anahtar ağızı	s	19,00	22,00	24,00
Diagonal / Köşegen	e min.	20,91	24,27	26,51
Height / Yükseklik	max.	10,00	11,00	13,00
	Weight / Ağırlık	gr/p	13,70	21,30

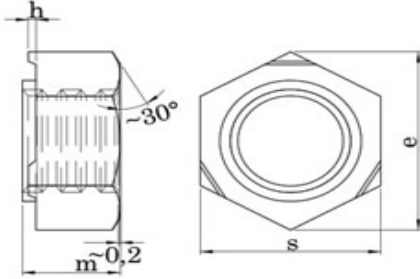

DIN 929 hexagon weld nuts have three equally spaced welding projections for solid contact with the weld surface. The projections help to accommodate weld surfaces that may not be perfectly flat. It also features a precision pilot for accurate location and threading of mated components and protecting the threads from welding spatter.

