




## DIN 936

## HEXAGON THIN NUTS

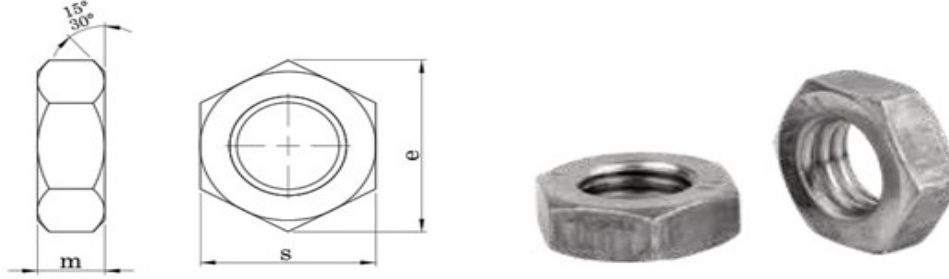

Teknik Bilgiler / Technical Informations		M6	M8	M10	M12	M14	M16	M18	M20	
Thread size / Anma çapı (d)										
Pitch / Diş adımı	P1			1,00	1,25			1,50	1,50	
	P2		1,00	1,25	1,50	1,50	1,50	2,00	2,00	
	P3	1,00	1,25	1,50	1,75	2,00	2,00	2,50	2,50	
Head width / Anahtar ağızı	s	min.		12,73	16,73	18,67	21,67	23,67	26,16	
		max.	10,00	13,00	17,00	19,00	22,00	24,00	27,00	30,00
Diagonal / Köşegen	e		14,38	18,90	21,10	24,49	26,75	29,56	32,95	
Height / Yükseklik	m	max.	3,00	5,00	6,00	7,00	8,00	8,00	9,00	9,00
		min.		4,70	5,70	6,64	7,42	7,42	8,42	8,10
Weight / Ağırlık	gr/p	1,50	4,00	8,60	12,10	18,20	20,10	29,60	36,30	



DIN 936 Low Profile Hex Nuts are similar to a hex jam nut (DIN 439) but with slightly different heights. They are thin hex nuts about half as thick as a regular hex nut. They are often used as lock nuts, where they are threaded up against a standard nut locking it in place or in any circumstance where a standard nut is too thick for an application, a hex jam nut can be a very useful alternative.

