


## DIN 7971

## SLOTTED PAN HEAD TAPPING SCREWS

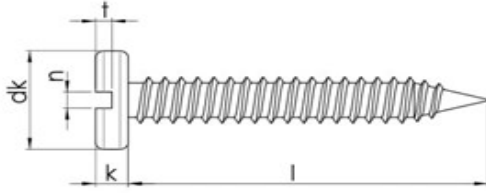

Teknik Bilgiler / Technical Informations									
Thread size / Anma çapı (d)		2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
Head dia / Kafa çapı dk	min.	4,20	5,60	6,90	7,50	8,20	9,50	10,80	12,50
	max.	3,90	5,30	6,54	7,14	7,84	9,14	10,37	12,07
Head height / Kafa yüksekliği k	min.	1,15	1,50	1,85	2,00	2,15	2,50	2,85	3,30
	max.	1,35	1,75	2,10	2,25	2,45	2,80	3,20	3,65
Socket width / Yarık Genişliği n	nominal size	0,60	0,80	1,00	1,00	1,20	1,20	1,60	1,60
	min.	0,66	0,66	1,06	1,06	1,26	1,26	1,66	1,66
	max.	0,80	1,00	1,20	1,06	1,51	1,51	1,91	1,91
Socket depth / Yarık Derinliği t	min.	0,55	0,75	0,95	1,05	1,15	1,35	1,55	1,8
	max.	0,80	1,00	1,25	1,40	1,50	1,70	1,95	2,20

Thread size / Anma çapı (d)		2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
Length / Boy (l)	min.	Weight / Ağırlık gr/p							
	max.								
4.5	3,70	5,30	0,17						
6.5	5,70	7,30	0,21	0,42					
9.5	8,70	10,30	0,27	0,53	0,84	1,07	1,26	1,85	
13	12,20	13,80	0,34	0,66	1,02	1,29	1,50	2,18	3,24
16	15,20	16,80	0,40	0,77	1,17	1,48	1,71	2,46	3,82
19	18,20	19,80		0,87	1,32	1,67	1,92	2,74	4,00
22	21,20	22,80			1,47	1,86	2,13	3,02	4,38
25	24,20	25,80			1,62	2,05	2,34	3,30	4,76
32	30,70	33,30					2,83	3,96	5,67
38	36,70	39,30						4,52	6,45
									8,82



DIN 7971 Pan Head Slot Drive Self Tapping Sheet Metal Screws are thread forming screws that tap their own threads in the substrate into which they are driven – usually thin metal. The slot drive accepts a single blade slot screwdriver ideal for simple manual applications.