



DIN 84

SLOTTED PAN HEAD SCREWS

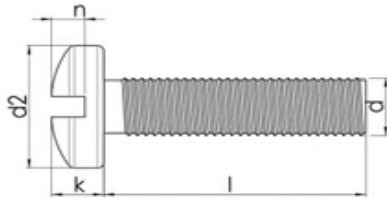

Teknik Bilgiler / Technical Informations								
Thread size / Anma çapı (d)	M2	M2,5	M3	M4	M5	M6	M8	M10
Head height / Kafa yükseliği k	1,30	1,60	2,00	2,60	3,30	3,90	5,00	6,00
Head dia / Kafa çapı d2	3,80	4,50	5,50	7,00	8,50	10,00	13,00	16,00
Socket width / Yarık genişliği n	0,50	0,60	0,80	1,00	1,20	1,60	2,00	2,50
Socket depth / Yarık derinliği t	min.	0,60	0,70	0,90	1,20	1,50	1,80	2,10
	max.	0,80	0,90	1,15	1,50	1,80	2,60	3,00

Thread size / Anma çapı (d)			M2	M2,5	M3	M4	M5	M6	M8	M10
Length / Boy (l)	min.	max.	Weight / Ağırlık gr/p							
5	4,75	5,25	0,20	0,33	0,56	1,09				
6	5,75	6,25	0,22	0,36	0,60	1,17	2,06			
8	7,70	8,30	0,25	0,42	0,69	1,33	2,20	3,56		
10	9,70	10,30	0,29	0,48	0,78	1,47	2,55	3,92	7,85	
12	11,65	12,35	0,33	0,54	0,87	1,63	2,80	4,27	8,49	14,60
16	14,65	15,35	0,40	0,66	1,04	1,95	3,30	4,98	9,77	16,60
20	19,60	20,40	0,48	0,78	1,22	2,25	3,78	5,69	11,00	18,60
25	24,60	25,40			1,44	2,64	4,40	6,56	12,60	21,10
30	29,60	30,40			1,66	3,02	5,02	7,45	14,20	23,60
35	34,50	35,50			1,88	3,41	5,62	8,25	15,80	26,10
40	39,50	40,50			2,10	3,80	6,25	9,20	17,40	28,60
45	44,50	45,50				4,17	6,88	10,00	18,90	31,10
50	50,50	50,50				4,57	7,50	10,90	20,60	33,60
55	54,00	56,00							22,10	36,10
60	59,00	61,00								38,60



DIN 84 is a slotted drive machine screw with a cheese head. Machine screws are externally threaded fasteners designed to be mated with threaded nuts or tapped holes in the parts they are designed to hold together. DIN 84 Slotted Cheese Head Machine Screws are fully threaded and can be used for many applications.