


**DIN 6915****HIGH- STRENGTH HEXAGON NUTS**

Teknik Bilgiler / Technical Informations		M12	M16	M20	M22	M24	M27	M30	M36
Thread size / Anma çapı (d)									
Pitch / Diş adımı	P	1,75	2,00	2,50	2,50	3,00	3,00	3,50	4,00
Head width / Anahtar ağızı s	min.	21,16	26,16	31,00	35,00	40,00	45,00	49,00	58,80
	max.	22,00	27,00	32,00	36,00	41,00	46,00	50,00	60,00
Diagonal / Köşegen	e	23,91	29,56	35,03	39,55	45,20	50,85	55,37	66,44
Height / Yükseklik	min.	9,64	12,30	14,90	16,90	17,70	20,70	22,70	27,70
	max.	10,00	13,00	16,00	18,00	19,00	22,00	24,00	29,00
Weight / Ağırlık	gr/p	23,30	44,80	73,90	104,00	155,00	224,00	300,00	515,00



DIN 6915 Nuts act as a releasable connection or fastening element for all types of components. Most of DIN 6915 Nuts are made of steel, stainless steel, brass, aluminium, rust and acid resistant materials, heat resistant alloys, alloy steel, unalloyed steel or special alloys with different quality and strengths. DIN 6915 Nuts are available in all possible sizes for mainly used in Mechanical Engineering, Automotive and Steel Construction.

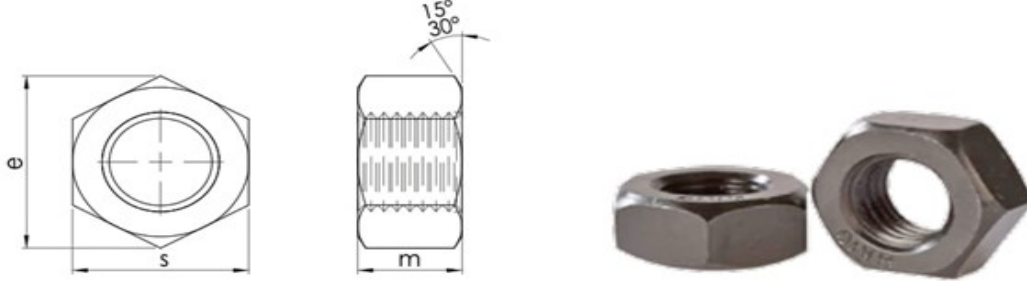